


Technical Data Sheet

Freestanding Mast for Stacks

FS - RM

Product Line

FS-RM - Freestanding Mast for Stacks

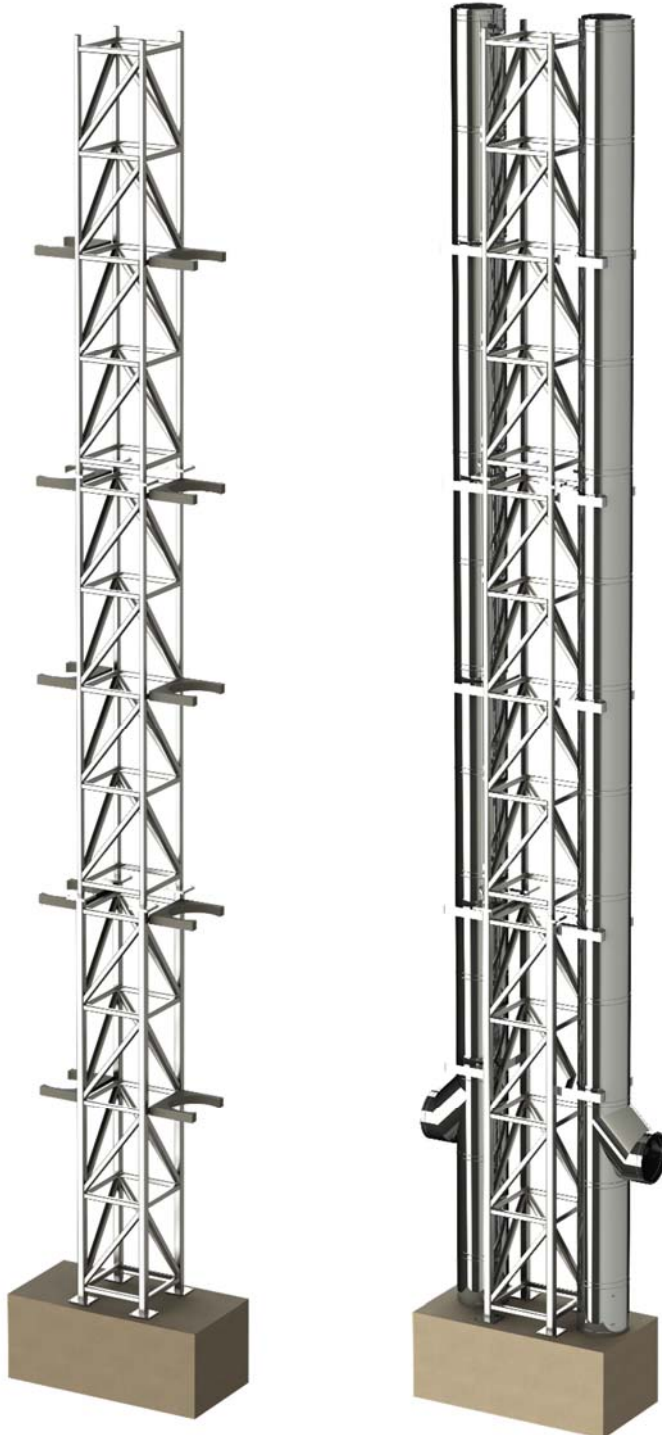

Applications

Double Wall and insulated freestanding mast system for commercial and/or industrial use.

All applications and fuels: gas, oil, wood, coal, or other gaseous and solid fuels.

Purpose

Solution where higher terminations are permitted without building connection/supports.

Less cost than typical freestanding stacks as it utilizes standard DWKL pipe and fittings.

Compliance

Utilizes standard DWKL that is UL and ULC Listed to all Chimney and Duct related Standards.

Materials / Construction

Standard DWKL Flues made of all stainless steel.

Mast may be coated steel or stainless steel.

Connection / Installation Details

Standard DWKL flue connections.

Mast ships in maximum 40' sections for bolting together on site.

Features

- Separation of DWKL Double Wall exhaust and supporting mast.
- Mast does not require flue gas corrosion allowance like freestanding single wall stacks do.
- Add ladders and platforms as needed.

Product Specifications

[FSA - Freestanding Stacks with Single or 'X' Multiple Liners](#)

All diameters, 3" through 36".

Single stack inside cage or multiple stacks.

Technical Data Sheet

Freestanding Mast for Stacks

FS - RM

Product Line

FS-RM - Freestanding Mast for Stacks

