


TECHNICAL DATA SHEET

Freestanding Mast for Stacks

FS-RM

PRODUCT LINE

FS-RM - Freestanding Mast for Stacks

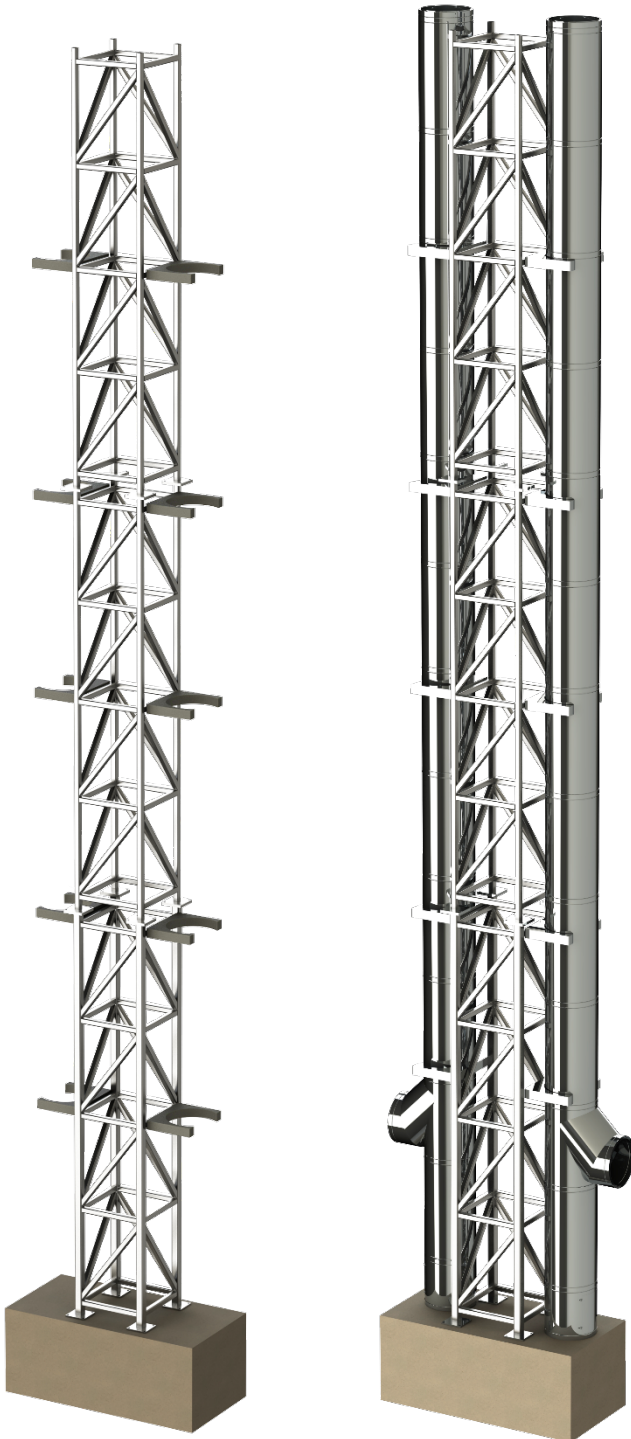

APPLICATIONS

- Double Wall and insulated freestanding mast system for commercial and/or industrial use
- All applications and fuels: gas, oil, wood, coal, or other gaseous and solid fuels

PURPOSE

- Solution where higher terminations are permitted without building connection/supports
- Lower cost than typical freestanding stacks as it utilizes standard DWKL pipe and fittings

COMPLIANCE

- Utilizes standard DWKL that is UL and ULC Listed to all Chimney and Duct related Standards

MATERIALS/CONSTRUCTION

- Standard KL, FL, GV, or CK Flues made of all stainless-steel
- Mast may be coated steel or stainless steel

CONNECTION / INSTALLATION DETAILS

- Standard DWKL flue connections
- Mast ships in maximum 40' sections for bolting together on-site

FEATURES

- Separation of DWKL Double Wall Exhaust and supporting mast
- Mast does not require flue gas corrosion allowance like freestanding single wall stacks do
- Add ladders and platforms as needed

PRODUCT SPECIFICATIONS

- FSA - Freestanding Stacks with Single or 'X' Multiple Liners
- All Diameters, 3" through 36"
- Single stack inside cage or multiple stacks



TECHNICAL DATA SHEET

Freestanding Mast for Stacks



FS-RM

PRODUCT LINE

FS-RM - Freestanding Mast for Stacks

