


TECHNICAL DATA SHEET

Freestanding Stack

FSA (X)

PRODUCT LINE

FSA - Freestanding Stacks with Single or 'X' Multiple Liners

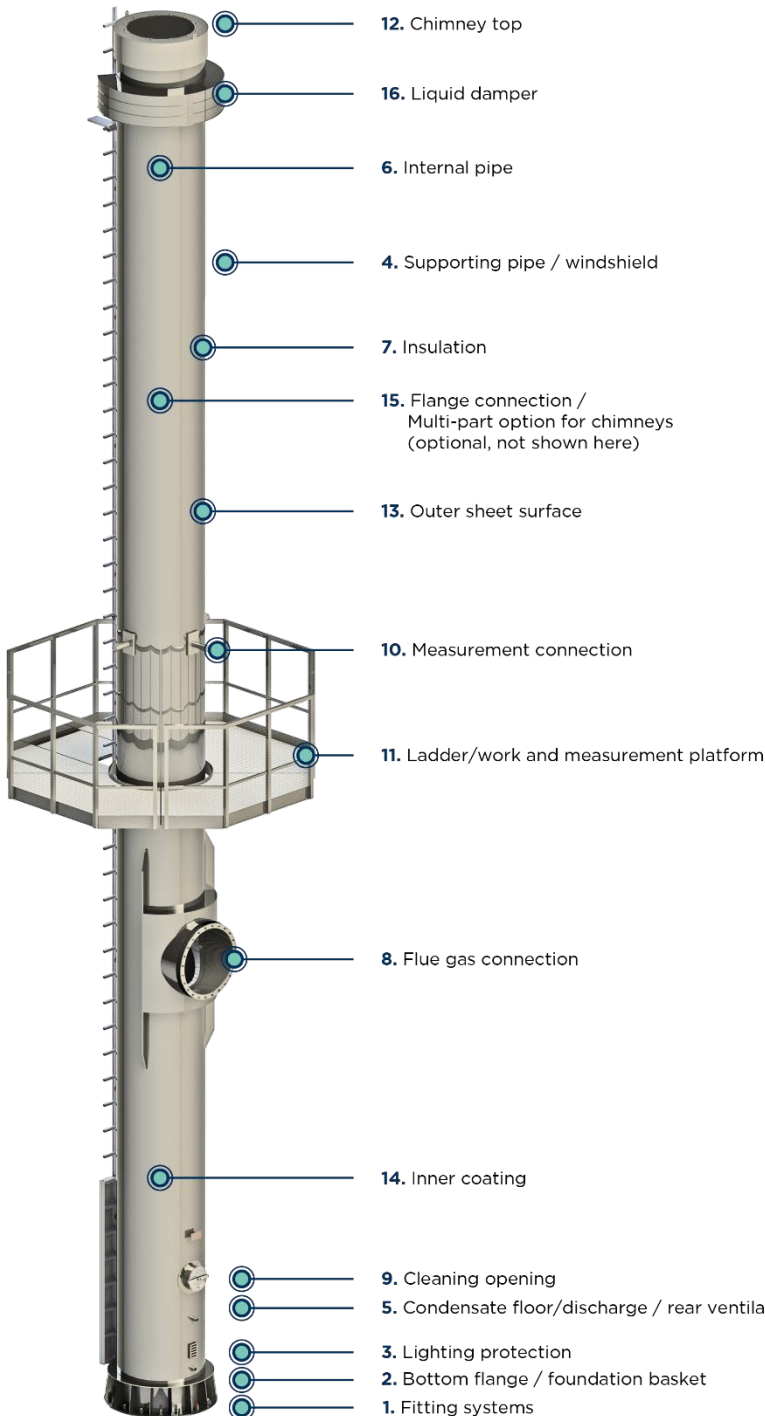

APPLICATIONS

- Double Wall, insulated freestanding stack for commercial and/or industrial use
- All applications and fuels: gas, oil, wood, coal, or other gaseous and solid fuels

PURPOSE

- Compact solution where higher terminations are permitted without building connection or support

COMPLIANCE

- Inner liner can be applicable for all Jeremias UL and ULC Listing

MATERIALS/CONSTRUCTION

- Liner(s) are always made of all-stainless steel
- Shell may be coated steel or stainless steel

CONNECTION / INSTALLATION DETAILS

- Multi-flanged for inner and outer jackets are attached on-site
- Interior liners are seated overlapping joints to assure gas seal and a long life

FEATURES

- Separation of internal liner and external supporting shell
- Add ladders and platforms as needed
- Acceleration jets, deflector hoods, or silencers can be added



TECHNICAL DATA SHEET

Freestanding Stack

FSA (X)

PRODUCT LINE

FSA - Freestanding Stacks with Single or 'X' Multiple Liners



PRODUCT SPECIFICATIONS

FSA - Freestanding Stacks with Single or 'X' Multiple Liners

- All Diameters, 3" through 36"
- Model FSA is designed for a Single Liner
- Model FSA-X is designed for multiple liners, where 'X' designates the number of liners

